


SD-404, KT-404

Standard AD board & kit for LCD display



Features

- VGA, DVI, Audio input
- Flexible, low cost and high performance
- For industrial, kiosk, gaming, digital signage applicator
- For 5.7" - 70" LCD panel with LVDS interface
- Dual channel stereo audio with 8 ohm 2W x 2



Specifications

Video	Hor. Frequency	30 ~ 94 KHz
	Ver. Frequency	48 - 75 Hz
	Resolution	1920x1200 @60Hz
	Pixel rate	205MHz for VGA 165MHz for DVI
	Plug & Play	DDC/CI
Colors	8 bit 16.7M true color	
	9300K, 7500K, 6500K, user mode	
OSD adjustment	Power, Auto, Up, Down, Menu	
	Multi-languages	
Temperature	Operation	0 ~ 40 degree C
	Storage	-40 ~ 70 degree C

Input	VGA connector	15 pin D-sub
	DVI-D connector	24+5P D-sub
	DC connector *	2.1mm diameter
Power	DC input	12 Vdc / 0.25A
	Consumption	< 3W
	Power saving	< 0.5W
	Management	VESA DPMS
	Panel selection	3.3V / 5V
Dimension	131 (L) x 51 (W) x 14.26 (H) mm	
	Packing quantity	100 pcs / carton
Agency	FCC / CE compliance	


* Changeable to 2.5mm diameter DC jack.

Ordering information

- Kit accessory :
 - 1). OSD board
 - 2). OSD wire
- Selected options :

1). LVDS wire	2). LED wire	3). VGA cable
4). DVI cable	5). LED controller	6). Power adapter
7). Power cord'	8). Audio cable	9). Speaker

Product drawing

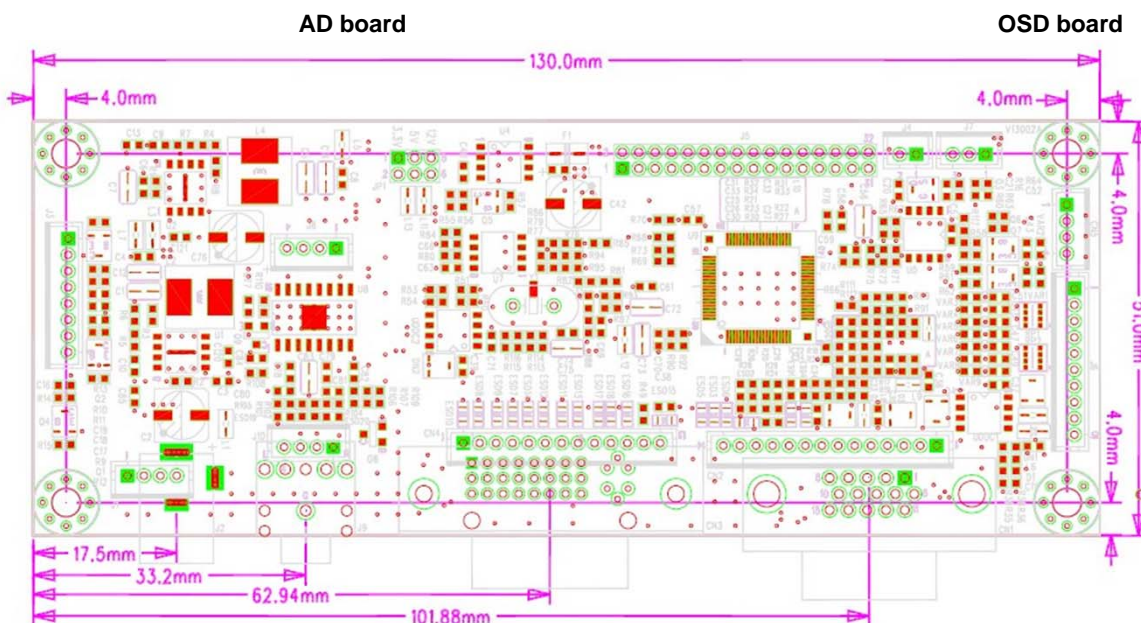

* All specification and photos are subject to change without notice.