


SD-910, KT-910

Standard AD board & kit for LCD display



Features

- VGA, DVI-I, HDMIx2, audio, USB input
- For large size digital signage application
- High performance with LVDS interface
- Support USB player, MP3, JPEG
- 5W+5W stereo audio
- 3D comb filter
- Optional CVBS and YPbPr input
- Optional RS232 and 485 control
- Optional light sensor and IR remote controller

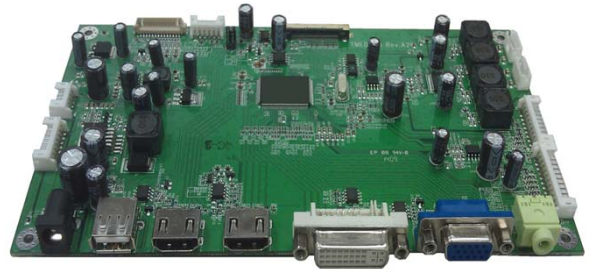

Specifications

Video	Hor. Frequency	30 ~ 94 KHz
	Ver. Frequency	50 - 75 Hz
	Resolution	1920x1200 @60Hz
	Pixel rate	205MHz for Analog 225MHz for Digital
	Plug & Play	DDC 1/2 Bi, 2B+
Colors	8/10 bit 16.7M true color	
	9300K, 7500K, 6500K, user mode	
OSD adjustment	Power, Menu, U, D, +, -, Select	
	Multi-languages	
Dimension	190 (L) x 105 (W) x 18 (H) mm	
	Packing quantity	50 pcs / carton
Temperature	Operation	-10 ~ 50 degree C
	Storage	-20 ~ 80 degree C


Input	VGA connector	15 pin D-sub
	DVI connector	24+5P D-sub
	HDMI connector x2	HDMI v1.3 / 1.4
	Audio connector	phone jack
	DC connector	2.5mm diameter
Optional input	USB connector	Type A
	AV connector	RCA connector
Power	DC input	12 Vdc / 0.7A
	Consumption	~ 8W
	Power saving	< 0.5W
	Management	VESA DPMS
	Panel selection	3.3V / 5V / 12V
Agency	Auxiliary o/p	12V / 5V
	FCC / CE compliance	

Ordering information

- Kit accessory :
 - 1). OSD board
 - 2). OSD wire
- Selected options :

1). LVDS wire	2). LED wire	3). VGA cable
4). LED controller	5). Power adapter	6). Power cord
7). IR remote controller	8). DVI cable	9). HDMI cable

Product drawing

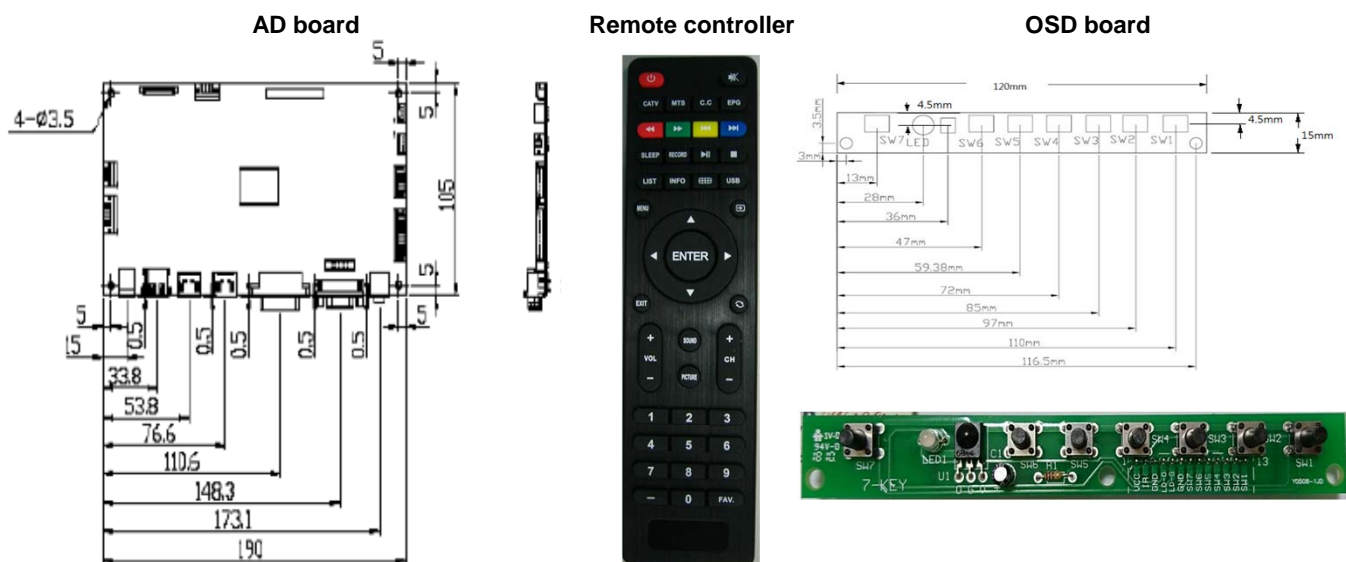

* All specification and photos are subject to change without notice.