

SD-912, KT-912

Standard AD board & kit for LCD display



Features

- VGA, DVI, HDMI x2, DP x2, Audio, USB input
- High performance 4096x2160 @60Hz
- 4 port LVDS and 8pair V-by-one output
- For large size digital signage application
- Dual channel stereo audio with 8 ohm 5W x 2
- Optional video wall function
- Optional RS232/485 control
- Optional light sensor and IR remote control



Specifications


Video	Hor. Frequency	23 ~ 94 KHz
	Ver. Frequency	50 - 75 Hz
	Resolution	4096x2160 @60Hz
	Pixel rate	205MHz for Analog
		225MHz for Digital
Plug & Play	DDC/CI	
Colors	10 bit 1074M true color	
	9300K, 7500K, 6500K, user mode	
OSD adjustment	Power, Menu, U, D, +, -, Select	
	English	
Dimension	235 (L) x 130 (W) x 18 (H) mm	
	Packing quantity	50 pcs / carton
Temperature	Operation	-10 ~ 50 degree C
	Storage	-20 ~ 80 degree C

Input	VGA connector	15 pin D-sub
	DVI connector	24+5P D-sub
	HDMI connector x2	HDMI v1.3 / 1.4
	Display port x2	V 1.2a
	Audio connector	3.5mm phone jack
	DC connector	2.5mm diameter
	USB connector	Type A
Optional input	RS232 connector	9 pin D-sub
Power	DC input	12 Vdc / 1A
	Consumption	< 15W
	Power saving	< 1W
	Management	VESA DPMS
	Panel selection	3.3V / 5V / 12V
Auxiliary o/p	12V / 5V	
Agency	FCC / CE compliance	

Ordering information

- Kit accessory :
 - 1). OSD board
 - 2). OSD wire
- Selected options :
 - 1). LVDS wire
 - 2). LED wire
 - 3). VGA cable
 - 4). HDMI cable
 - 5). DP cable
 - 6). LED controller
 - 7). Power adapter
 - 8). Power cord
 - 9). Audio cable
 - 10). Speaker
 - 11). Light sensor / IR board
 - 12). IR remote controller


Product drawing

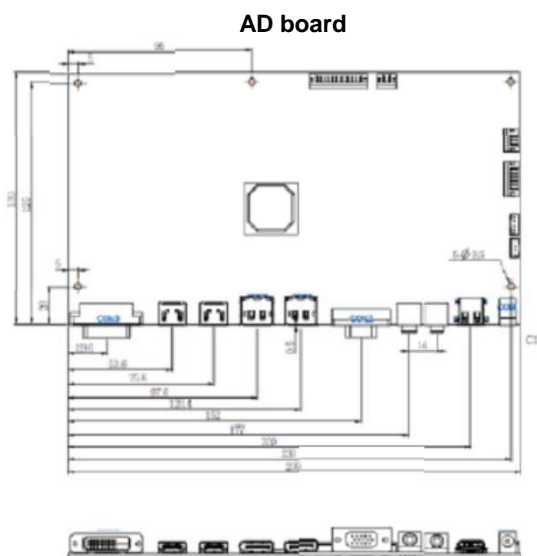

Remote controller



OSD board

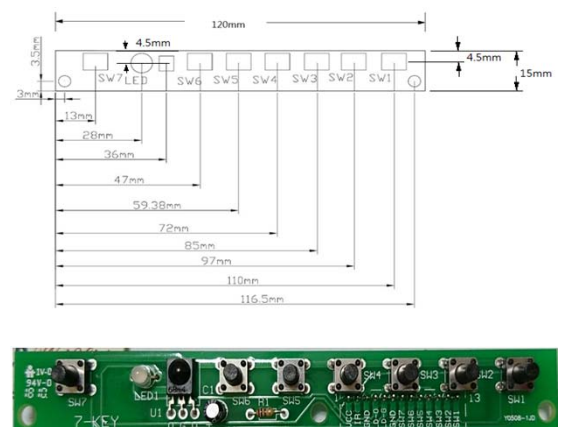

* All specification and photos are subject to change without notice.